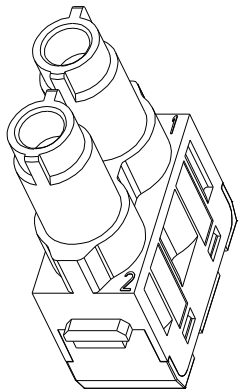

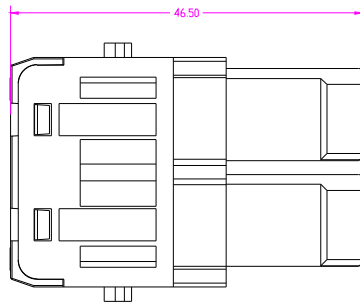



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F





技术参数:  
 插芯:  
 插针数: 2  
 额定电流: 70A  
 额定电压: 1000V  
 额定耐受脉冲电压: 8KV  
 污染等级: 3  
 材料: Polycarbonate

插针:  
 接线方式: 轴向螺栓连接  
 材料: 铜合金  
 表面处理: 镀银  
 接触电阻:  $\leq 0.5m\Omega$   
 线径范围: 14~22mm<sup>2</sup>  
 内六角扳手: SW2.5

Specifications:  
 Inserts:  
 Number of contacts: 2  
 Rated current: 70A  
 Rated voltage: 1000V  
 Rated impulse voltage: 8KV  
 Pollution degree: 3  
 Material: Polycarbonate

Contacts:  
 Terminal: screw terminal  
 Material: Copper alloy  
 Surfac: hard-silver plated  
 Contact resistance:  $\leq 0.5m\Omega$   
 Crimp terminal  
 Wire gauge--mm<sup>2</sup>: 14~22mm<sup>2</sup>  
 Wire gauge--AWG:  
 Hexaonal driver: SW2.5

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.	
0~ $\leq 20$ $\pm 0.15$	DRAW			Size	A4		
20~ $\leq 50$ $\pm 0.25$	DESIGN			Scale		PART NAME: HZW-HMK7-002.2-F	
50~ $\leq 80$ $\pm 0.35$	CHECK			Sheet		Drawing NO.	REV
80~ $\leq 120$ $\pm 0.50$	APPROVE			Proj.		Material	A

1 2 3 4 5 6 7 8